Notice No. BDF:15032601.bah

Public Notice Beginning Date: July 31, 2015

Public Notice Ending Date: August 31, 2015

National Pollutant Discharge Elimination System (NPDES)
Permit Program

PUBLIC NOTICE/FACT SHEET

of

Draft Reissued NPDES Permit to Discharge into Waters of the State

Public Notice/Fact Sheet Issued By:

Illinois EPA
Division of Water Pollution Control
Permit Section
1021 North Grand Avenue East
Post Office Box 19276
Springfield, Illinois 62794-9276
217/782-0610

Name and Address of Discharger:

Village of Ladd 121 North Main Street Post Office Box 303 Ladd, Illinois 61329 Name and Address of Facility:

Village of Ladd - STP North Main Street Ladd, Illinois 61329 (Bureau County)

The Illinois Environmental Protection Agency (IEPA) has made a tentative determination to issue a NPDES Permit to discharge into the waters of the state and has prepared a draft Permit and associated fact sheet for the above named discharger. The Public Notice period will begin and end on the dates indicated in the heading of this Public Notice/Fact Sheet. All comments on the draft Permit and requests for hearing must be received by the IEPA by U.S. Mail, carrier mail or hand delivered by the Public Notice Ending Date. Interested persons are invited to submit written comments on the draft Permit to the IEPA at the above address. Commentors shall provide his or her name and address and the nature of the issues proposed to be raised and the evidence proposed to be presented with regards to those issues. Commentors may include a request for public hearing. Persons submitting comments and/or requests for public hearing shall also send a copy of such comments or requests to the Permit applicant. The NPDES Permit and notice numbers must appear on each comment page.

The application, engineer's review notes including load limit calculations, Public Notice/Fact Sheet, draft Permit, comments received, and other documents are available for inspection and may be copied at the IEPA between 9:30 a.m. and 3:30 p.m. Monday through Friday when scheduled by the interested person.

If written comments or requests indicate a significant degree of public interest in the draft Permit, the permitting authority may, at its discretion, hold a public hearing. Public notice will be given 45 days before any public hearing. Response to comments will be provided when the final Permit is issued. For further information, please call Brant Fleming at 217/782-0610.

The following water quality and effluent standards and limitations were applied to the discharge:

Title 35: Environmental Protection, Subtitle C: Water Pollution, Chapter I: Pollution Control Board and the Clean Water Act were applied in determining the applicable standards, limitations and conditions contained in the draft Permit.

The applicant is engaged in treating domestic and industrial wastewater for the Village of Ladd.

The length of the Permit is approximately 5 years.

The main discharge number is 001. The seven day once in ten year low flow (7Q10) of the receiving stream, unnamed tributary to Spring Creek is 0 cfs.

The design average flow (DAF) for the facility is 0.365 million gallons per day (MGD) and the design maximum flow (DMF) for the facility is 2.85 MGD. Treatment consists of screening, grit removal, 2-cell aerated lagoons followed by a rock filter.

Public Notice/Fact Sheet -- Page 2 -- NPDES Permit No. IL0021491

This Reissued Permit does not increase the facility's DAF, DMF, concentration limits, and/or load limits.

Pursuant to the waiver provisions authorized by 40 CFR § 123.24, this draft permit is within the class, type, and size for which the Regional Administrator, Region V, has waived his right to review, object, or comment on this draft permit action.


This Permit recognizes and continues the year-round disinfection exemption approved by the IEPA on March 21, 1990 and included in past NPDES permit actions since that date. It is the IEPA's tentative decision that under Illinois Pollution Control Board regulations, the following reach of waterbody is not classified for primary contact use activities and is not subject to the fecal coliform water quality standard of 35 III. Adm. Code 302.209.

This draft permit does not contain requirements for disinfection of the discharge from discharge numbers(s) 001. Unnamed tributary to Spring Creek has been determined to be unsuited to support primary contact activities (swimming) due to physical, hydrologic or geographic configuration. Anyone knowing of primary contact activities occurring within this water segment is invited to submit comments to the IEPA. Comments should give the nature of the activities (i.e swimming, fishing, canoeing, etc.), the location and months of the year when these activities have been observed. The IEPA is also interested in obtaining information on the proximity of residential dwellings and the accessibility of the public to this water segment. Anyone with such information is asked to submit comments to the IEPA on this draft permit action. Instructions for submitting comments are contained earlier in this document.

Application is made for the existing discharge(s) which is located in Bureau County, Illinois. The following information identifies the discharge point, receiving stream and stream classifications:

Discharge Number	Receiving Stream	<u>Latitude</u>	<u>Longitude</u>	Stream Classification	Integrity Rating
001	Unnamed tributary to Spring Creek	41° 23′ 20″ North	81° 11′ 34″ West	General Use	Not Rated

To assist you further in identifying the location of the discharge(s) please see the attached map.

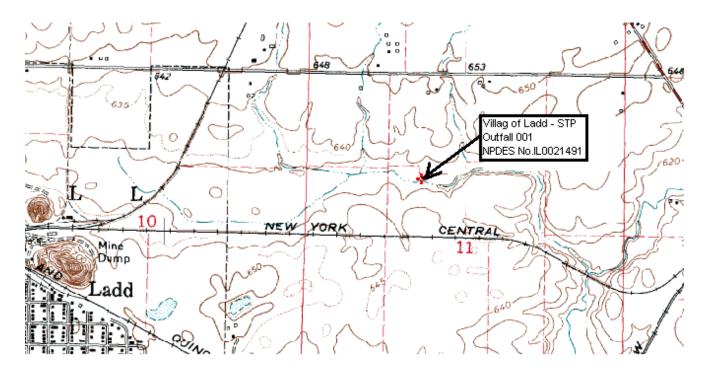

The stream segment(s), tributary to DZP, receiving the discharge from outfall(s) 001 is not on the 2014 303 (d) list of impaired waters.

Public Notice/Fact Sheet -- Page 3 -- NPDES Permit No. IL0021491

The discharge(s) from the facility is (are) proposed to be monitored and limited at all times as follows:

Discharge Number(s) and Name(s): 001 STP Outfall

Load limits computed based on a design average flow (DAF) of 0.365 MGD (design maximum flow (DMF) of 2.85 MGD).

The effluent of the above discharge(s) shall be monitored and limited at all times as follows:

	LOAD LIMITS lbs/day <u>DAF (DMF)*</u>		CONCENTRATION <u>LIMITS mg/L</u>				
<u>Parameter</u>	Monthly <u>Average</u>	Weekly <u>Average</u>	Daily <u>Maximum</u>	Monthly Average	Weekly <u>Average</u>	Daily <u>Maximum</u>	Regulation
CBOD₅**	76 (594)	122 (951)		25	40		35 IAC 304.120 40 CFR 133.102
Suspended Solids**	113 (880)	137 (1,070)		37	45		35 IAC 304.120 40 CFR 133.102
pH	Shall be in the range of 6 to 9 Standard Units						35 IAC 304.125
Fecal Coliform	Monitor only (May through October)						35 IAC 304.121
Chlorine Residual						0.05	35 IAC 302.208
Ammonia Nitrogen:	Monitor only						35 IAC 309.146
				Monthly Avg. not less than	Weekly Avg. not less than	Daily Minimum	
Dissolved Oxygen March-July				N/A	6.0	5.0	35 IAC 302.206
August-February				5.5	4.0	3.5	

^{*}Load Limits are calculated by using the formula: 8.34 x (Design Average and/or Maximum Flow in MGD) x (Applicable Concentration in mg/L)

^{**}BOD $_5$ and Suspended Solids (85% removal required): In accordance with 40 CFR 133, the 30-day average percent removal shall not be less than 85 percent except as provided in Sections 133.103 and 133.105.

Public Notice/Fact Sheet -- Page 4 -- NPDES Permit No. IL0021491

This draft Permit also contains the following requirements as special conditions:

- 1. Reopening of this Permit to include different final effluent limitations.
- 2. Operation of the facility by or under the supervision of a certified operator.
- 3. Submission of the operational data in a specified form and at a required frequency at any time during the effective term of this Permit.
- 4. More frequent monitoring requirement without Public Notice in the event of operational, maintenance or other problems resulting in possible effluent deterioration.
- 5. Prohibition against causing or contributing to violations of water quality standards.
- 6. Recording the monitoring results on Discharge Monitoring Report Forms using one such form for each outfall each month and submitting the forms to IEPA each month.
- 7. The provisions of 40 CFR Section 122.41(m) & (n) are incorporated herein by reference.
- 8. Effluent sampling point location.
- 9. At minimum of 85% removal of CBOD₅ and suspended solids.
- 10. Controlling the sources of infiltration and inflow into the sewer system.
- 11. A requirement to monitor and a limit of 0.05 mg/L for residual chlorine when it is used.
- 12. Submission of annual fiscal data.
- 13. Capacity, Management, Operations, and Maintenance (CMOM) plan.

Illinois Environmental Protection Agency

Division of Water Pollution Control

1021 North Grand Avenue East

Post Office Box 19276

Springfield, Illinois 62794-9276

NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM

Reissued (NPDES) Permit

Expiration Date: Issue Date: Effective Date:

Name and Address of Permittee:

Village of Ladd

Village of Ladd - STP

121 North Main Street

Post Office Box 303

Ladd, Illinois 61329

(Bureau County)

Receiving Waters: Unnamed tributary to Spring Creek

In compliance with the provisions of the Illinois Environmental Protection Act, Title 35 of the Ill. Adm. Code, Subtitle C, Chapter I, and the Clean Water Act (CWA), the above-named Permittee is hereby authorized to discharge at the above location to the above-named receiving stream in accordance with the Effluent Limitations, Monitoring, and Reporting requirements; Special Conditions and Attachment H Standard Conditions attached herein.

Permittee is not authorized to discharge after the above expiration date. In order to receive authorization to discharge beyond the expiration date, the Permittee shall submit the proper application as required by the Illinois Environmental Protection Agency (IEPA) not later than 180 days prior to the expiration date.

Alan Keller, P.E. Manager, Permit Section Division of Water Pollution Control

SAK:BDF:15032601.bah

Effluent Limitations, Monitoring, and Reporting

Discharge Number(s) and Name(s): 001 STP Outfall

Load limits computed based on a design average flow (DAF) of 0.365 MGD (design maximum flow (DMF) of 2.85 MGD).

From the effective date of this Permit until the expiration date, the effluent of the above discharge(s) shall be monitored and limited at all times as follows:

	LOAD LIMITS lbs/day <u>DAF (DMF)*</u>		CONCENTRATION LIMITS mg/L					
<u>Parameter</u>	Monthly Average	Weekly <u>Average</u>	Daily <u>Maximum</u>	Monthly Average	Weekly Average	<u>Daily</u> <u>Maximum</u>	Sample <u>Frequency</u>	Sample <u>Type</u>
Flow (MGD)							Continuous	
CBOD ₅ **,***	76 (594)	122 (951)		25	40		1 Day/Month	Composite
Suspended Solids***	113 (880)	137 (1,070)		37	45		1 Day/Month	Composite
pH	Shall be in the range of 6 to 9 Standard Units						1 Day/Month	Grab
Fecal Coliform	Monitor only	(May through	October)				1 Day/Month	Grab
Chlorine Residual						0.05	***	Grab
Ammonia Nitrogen: As (N)	Monitor only						1 Day/Month	Composite
				Monthly Average not less than	Weekly Average not less than	Daily Minimum		
Dissolved Oxygen March-July				N/A	6.0	5.0	1 Day/Month	Grab
August-February				5.5	4.0	3.5	1 Day/Month	Grab

^{*}Load limits based on design maximum flow shall apply only when flow exceeds design average flow.

Flow shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

Fecal coliform monitoring shall be performed May through October with sampling results reported on the DMR as a daily maximum.

pH shall be reported on the DMR as minimum and maximum value.

Chlorine Residual shall be reported on the DMR as daily maximum value.

Dissolved oxygen shall be reported on the DMR as a minimum value.

Ammonia nitrogen (as N) shall be reported on the DMR as a daily maximum value.

^{**}Carbonaceous BOD₅ (CBOD₅) testing shall be in accordance with 40 CFR 136.

^{***} The 30-day average percent removal shall not be less than 85 percent. See Special Condition 9.

^{****}See Special Condition 11.

Influent Monitoring, and Reporting

The influent to the plant shall be monitored as follows:

<u>Parameter</u>	Sample Frequency	Sample Type		
Flow (MGD)	Continuous			
BOD ₅	1 Day/Month	Composite		
Suspended Solids	1 Day/Month	Composite		

Influent samples shall be taken at a point representative of the influent.

Flow (MGD) shall be reported on the Discharge Monitoring Report (DMR) as monthly average and daily maximum.

BOD₅ and Suspended Solids shall be reported on the DMR as a monthly average concentration.

Special Conditions

<u>SPECIAL CONDITION 1</u>. This Permit may be modified to include different final effluent limitations or requirements which are consistent with applicable laws and regulations. The IEPA will public notice the permit modification.

SPECIAL CONDITION 2. The use or operation of this facility shall be by or under the supervision of a Certified Class 4 operator.

<u>SPECIAL CONDITION 3</u>. The IEPA may request in writing submittal of operational information in a specified form and at a required frequency at any time during the effective period of this Permit.

<u>SPECIAL CONDITION 4</u>. The IEPA may request more frequent monitoring by permit modification pursuant to 40 CFR § 122.63 and Without Public Notice.

<u>SPECIAL CONDITION 5</u>. The effluent, alone or in combination with other sources, shall not cause a violation of any applicable water quality standard outlined in 35 III. Adm. Code 302.

<u>SPECIAL CONDITION 6.</u> The Permittee shall record monitoring results on Discharge Monitoring Report (DMR) Forms using one such form for each outfall each month.

In the event that an outfall does not discharge during a monthly reporting period, the DMR Form shall be submitted with no discharge indicated.

The Permittee may choose to submit electronic DMRs (NetDMRs) instead of mailing paper DMRs to the IEPA. More information, including registration information for the NetDMR program, can be obtained on the IEPA website, http://www.epa.state.il.us/water/net-dmr/index.html.

The completed Discharge Monitoring Report forms shall be submitted to IEPA no later than the 25th day of the following month, unless otherwise specified by the permitting authority.

Permittees not using NetDMRs shall mail Discharge Monitoring Reports with an original signature to the IEPA at the following address:

Illinois Environmental Protection Agency Division of Water Pollution Control Attention: Compliance Assurance Section, Mail Code # 19 1021 North Grand Avenue East Post Office Box 19276 Springfield, Illinois 62794-9276

SPECIAL CONDITION 7. The provisions of 40 CFR Section 122.41(m) & (n) are incorporated herein by reference.

<u>SPECIAL CONDITION 8.</u> Samples taken in compliance with the effluent monitoring requirements shall be taken at a point representative of the discharge, but prior to entry into the receiving stream.

<u>SPECIAL CONDITION 9</u>. BOD_5 and Suspended Solids (85% removal required) For Discharge No. 001: In accordance with 40 CFR 133, the 30-day average percent removal shall not be less than 85 percent except as provided in Sections 133.103 and 133.105. The percent removal need not be reported to the IEPA on DMRs but influent and effluent data must be available, as required elsewhere in this Permit, for IEPA inspection and review. For measuring compliance with this requirement, 5 mg/L shall be added to the effluent $CBOD_5$ concentration to determine the effluent BOD_5 concentration.

Percent removal is a percentage expression of the removal efficiency across a treatment plant for a given pollutant parameter, as determined from the 30-day average values of the raw wastewater influent concentrations to the facility and the 30-day average values of the effluent pollutant concentrations for a given time period.

<u>SPECIAL CONDITION 10</u>. Consistent with permit modification procedures in 40 CFR 122.62 and 63, this Permit may be modified to include requirements for the Permittee on a continuing basis to evaluate and detail its efforts to effectively control sources of infiltration and inflow into the sewer system and to submit reports to the IEPA if necessary.

<u>SPECIAL CONDITION 11</u>. For Discharge No. 001, any use of chlorine to control slime growths, odors or as an operational control, etc. shall not exceed the limit of 0.05 mg/L (daily maximum) total residual chlorine in the effluent. Sampling is required on a daily grab basis during the chlorination process. Reporting shall be submitted on the DMR's on a monthly basis.

<u>SPECIAL CONDITION 12</u>. During January of each year the Permittee shall submit annual fiscal data regarding sewage system operations to the Illinois Environmental Protection Agency/Division of Water Pollution Control/Compliance Assurance Section. The Permittee may use any fiscal year period provided the period ends within twelve (12) months of the submission date.

Special Conditions

Submission shall be on forms provided by IEPA titled "Fiscal Report Form for NPDES Permittees".

SPECIAL CONDITION 13. The Permittee shall work towards the goals of achieving no discharges from sanitary sewer overflows or basement back-ups and ensuring that overflows or back-ups, when they do occur do not cause or contribute to violations of applicable standards or cause impairment in any adjacent receiving water. Overflows from sanitary sewers are expressly prohibited by this permit and by III. Adm. Code 306.304. In order to accomplish these goals of complying with this prohibition and mitigating the adverse impacts of any such overflows if they do occur the Permittee shall (A) identify and report to IEPA all SSOs that do occur, and (B) develop, implement and submit to the IEPA a Capacity, Management, Operations, and Maintenance (CMOM) plan which includes an Asset Management strategy within 12 months of the effective date of this Permit or review and revise any existing plan accordingly. The Permittee shall modify the Plan to incorporate any comments that it receives from IEPA and shall implement the modified plan as soon as possible. The Permittee should work as appropriate, in consultation with affected authorities at the local, county, and/or state level to develop the plan components involving third party notification of overflow events. The Permittee may be required to construct additional sewage transport and/or treatment facilities in future permits or other enforceable documents should the implemented CMOM plan indicate that the Permittee's facilities are not capable of conveying and treating the flow for which they are designed. The CMOM plan shall include the following elements:

A. Measures and Activities:

- 1. A complete map and system inventory for the collection system owned and operated by the Permittee;
- Organizational structure; budgeting; training of personnel; legal authorities; schedules for maintenance, sewer system
 cleaning, and preventative rehabilitation; checklists, and mechanisms to ensure that preventative maintenance is
 performed on equipment owned and operated by the Permittee;
- 3. Documentation of unplanned maintenance;
- 4. An assessment of the capacity of the collection and treatment system owned and operated by the Permittee at critical junctions and immediately upstream of locations where overflows and backups occur or are likely to occur; use flow monitoring as necessary:
- 5. Identification and prioritization of structural deficiencies in the system owned and operated by the Permittee;
- 6. Operational control, including documented system control procedures. Scheduled inspections and testing;
- 7. The Permittee shall develop and implement an Asset Management strategy to ensure the long-term sustainability of the collection system. Asset Management shall be used to assist the Permittee in making decisions on when it is most appropriate to repair, replace or rehabilitate particular assets and develop long-term funding strategies; and
- 8. Asset Management shall include but is not limited to the following elements:
 - a. Asset Inventory and State of the Asset;
 - b. Level of Service;
 - c. Critical Asset Identification;
 - d. Life Cycle Cost; and
 - e. Long-Term Funding Strategy.

B. Design and Performance Provisions:

- Monitor the effectiveness of CMOM;
- 2. Upgrade the elements of the CMOM plan as necessary; and
- 3. Maintain a summary of CMOM activities.

C. Overflow Response Plan:

- 1. Know where overflows and back-ups within the facilities owned and operated by the Permittee occur;
- 2. Respond to each overflow or back-up to determine additional actions such as clean up; and
- Locations where basement back-ups and/or sanitary sewer overflows occur shall be evaluated as soon as practicable
 for excessive inflow/infiltration, obstructions or other causes of overflows or back-ups as set forth in the System
 Evaluation Plan.

D. System Evaluation Plan:

- 1. Summary of existing SSO and Excessive I/I areas in the system and sources of contribution:
- Evaluate plans to reduce I/I and eliminate SSOs;
- 3. Special provisions for Pump Stations and force mains and other unique system components; and
- 4. Construction plans and schedules for correction.

Special Conditions

- E. Reporting and Monitoring Requirements:
 - 1. Program for SSO detection and reporting; and
 - 2. Program for tracking and reporting basement back-ups, including general public complaints.
- F. Third Party Notice Plan:
 - 1. Describes how, under various overflow scenarios, the public, as well as other entities, would be notified of overflows within the Permittee's system that may endanger public health, safety or welfare;
 - 2. Identifies overflows within the Permittee's system that would be reported, giving consideration to various types of events including events with potential widespread impacts;
 - 3. Identifies who shall receive the notification;
 - 4. Identifies the specific information that would be reported including actions that will be taken to respond to the overflow;
 - 5. Includes a description of the lines of communication; and
 - 6. Includes the identities and contact information of responsible POTW officials and local, county, and/or state level officials.

For additional information concerning USEPA CMOM guidance and Asset Management please refer to the following web site addresses. http://www.epa.gov/npdes/pubs/cmom_guide_for_collection_systems.pdf and http://water.epa.gov/type/watersheds/wastewater/upload/guide_smallsystems_assetmanagement_bestpratices.pdf

Special Conditions